
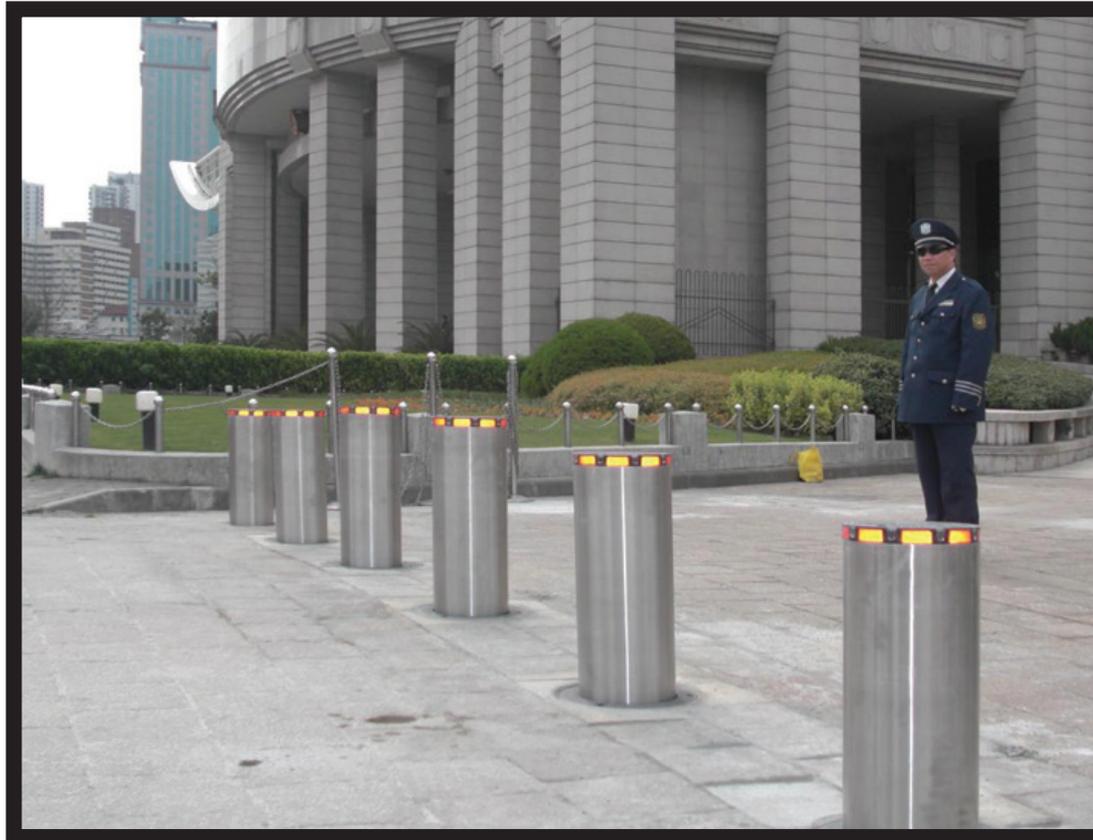


# GLOBOLL™

*AUTOMATIC RETRACTABLE SECURITY BOLLARDS*

*PRODUCT DETAIL SPECIFICATION*

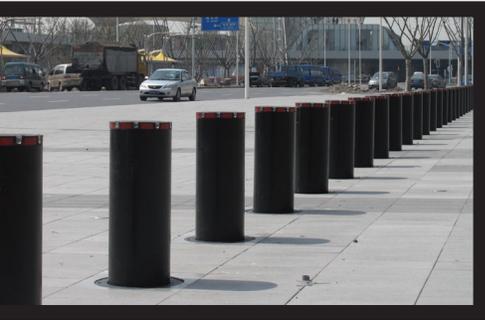

## AUTOMATIC RETRACTABLE SECURITY BOLLARDS

### PRODUCT DETAIL SPECIFICATION

#### 1.0 Scope

- 1.1 This specification defines the procurement of the Ameristar GloBall automatic bollard.
- 1.2 The basic system comprising of one or more vertical rising bollards operating independently or in sets as either a single direction, bi-directional or twin lane configuration, a hydraulic power unit, control cabinet containing the controls and logic circuits, indicator lights and further options.

#### 2.0 System Configuration

##### 2.1 Bollard(s)

- 2.1.1 The system shall have a total of (enter quantity) installed as in accordance with 2.1.1 or 2.1.2.
- 2.1.2 Select either 2.1.1 or 2.1.2 plus a, b, or c to define the operating pattern of the bollards within the system and delete the one not applicable.
- 2.1.3 Single bollards individually operated. Each individual bollard shall be operated independently from any other bollard within the system. Each bollard shall have its own controls and operate under one of the following configurations:
  - 2.1.3.1 Single Direction. Traffic flows in one direction only through the bollard system.
  - 2.1.3.2 Bi-Directional. Traffic flows in both directions through the same bollard.
- 2.1.4 Multi bollards operating in sets. The bollard system shall have (enter quantity) bollards operating together as a set. Each set of bollards shall have its own controls and operate independently of other systems under one of the following configurations:
  - 2.1.4.1 Single Direction. Traffic flows in one direction only through the bollard system.
  - 2.1.4.2 Bi-Directional. Traffic flows in both directions through the same bollard
- 2.1.5 Bollard Construction.
  - 2.1.5.1 The bollard shall be a below ground assembly consisting of a cylindrical outer casing complete with cable and drainage duct outlets and an inner bollard of mild or stainless steel cylindrical tube capable of being raised above ground into the up position. In the raised position the bollard shall present a formidable obstacle to approaching vehicles. Upon impact, forces shall first be absorbed by the inner bollard and then transmitted to the outer casing and foundation.
- 2.1.6 Bollard Height
  - 2.1.6.1 Height of the bollard in the raised position shall be 27.5" (700mm) as measured from ground level to the top of the inner bollard.
- 2.1.7 Bollard Dimensions
  - 2.1.7.1 Outer Casing: 16" (406mm) Diameter
  - 2.1.7.2 Inner Bollard: 10.75" (273mm) Diameter
  - 2.1.7.3 Aesthetics: Black or Stainless Steel

## AUTOMATIC RETRACTABLE SECURITY BOLLARDS

### PRODUCT DETAIL SPECIFICATION

#### 2.1.8 Hydraulic Pack & Circuit

**2.1.8.1** The bollard(s) are driven up and down by a hydraulic pump housed within the bollard casing. They will drive the bollards upon command from the main control system housed in a suitable cabinet/box in proximity to the bollard system.

**2.1.8.2** The hydraulic circuit shall include all necessary control logic, hydraulic hoses, and valves. Normal operation will allow the bollards to lower in the case of a power fail. In security applications the hydraulic circuit must be flexible enough to allow the bollards to remain in the raised position in power fail. This must be specified at the time of order.

#### 2.1.9 Power Fail

**2.1.9.1** In event of power failure the bollards will remain in their current position.

### 3.0 Control & Logic Circuits

#### 3.1 Control Circuit.

**3.1.1** A control circuit shall be provided to interface between the bollard(s), indicator lights (if required), safety and tracking induction loops (if required) and the hydraulic pumps. This circuit shall contain all relays, timers and other devices necessary for all the operations of the system as defined. All control equipment shall be situated above ground and within the main control cabinet

#### 3.2 Voltage

**3.2.1** The control circuit shall operate from a 110 volt, 60Hz single phase supply. An internal transformer shall reduce this to 24VC for all external devices.

#### 3.3 Control Box/Cabinet

**3.3.1** The control board and access control equipment shall be housed in a NEMA rated box, or a steel cabinet sufficient to house all the control circuits, and other devices for operation of the system that do not require external visibility (e.g. Radio Receiver) The control panel should have a mains power supply isolator.

#### 3.4 Indicator Lights (If specifying an auto rise system)

**3.4.1** Indicator Lights are required for systems were the bollards are to rise automatically. Indicator lights should comprise separate red and green lights.

**3.4.2** The green light shall indicate when the bollard is fully down. All other bollard positions shall cause the light to show red.

Specifying the Correct Number of Indicator Lights	
Operating Configuration	Number of Indicator Lights
Single Direction	1
Bi - Directional	2
<i>Repeater indicator lights may be specified when necessary. Please contact the manufacturer for details.</i>	

## AUTOMATIC RETRACTABLE SECURITY BOLLARDS

### PRODUCT DETAIL SPECIFICATION

#### 3.5 Induction Loops

- 3.5.1 Strategically positioned induction loops will allow the control system to detect a vehicle at all times and audit track the vehicle through the system. The number of induction loops required is dependent on the configuration of the system.
- 3.5.2 Whilst the lowering of the bollard(s) by timer is permitted the raising of the bollards must not be carried by timer. This needs to be carried out in a safe manner.

#### 4.0 Performance

##### 4.1 Experience

- 4.1.1 The bollard system shall be manufactured by a company that has over 500 automatic bollard systems installed and in around the world with documented logs of all major components and design features.

##### 4.2 Speed of Operation

- 4.2.1 Normal speed of operation shall be capable of raising or lowering the bollards between 4 and 8.5 seconds when operated at a repetition rate not greater than specified in 4.3. The control system shall be capable of reversing the bollard upward cycle at any time on a valid demand from the devices controlling the system.

##### 4.3 Frequency of Operation

- 4.3.1 The bollard shall be capable of **500** up/down cycles per day.

#### 5.0 Environment Data

##### 5.1 The bollard system shall operate satisfactorily under the following environmental conditions:

- 5.1.1 Extremes in Temperature The bollard system shall operate between the following temperatures.
  - 5.1.1.1 Normal Operating Temp for Control System: 40°C to -15°C
  - 5.1.1.2 Maximum Operating Temp for Hydraulic Oil: 90°C
  - 5.1.1.3 Minimum Operating Temp for Hydraulic Oil: - 54°C

##### 5.2 Rainfall

- 5.2.1 It is recommended the bollard outer casings are connected to a drain, via a sump if necessary. if this is not practical then a natural soak away should be constructed. It is imperative to note that a natural soak away should only be considered if connection to a drain is not possible; the success of a natural soak away will be dependent on the ground conditions.

#### 6.0 Shipment

- 6.1 The system will packaged in a sufficient manner for transport in the US so that the risk to damage is minimal. Export shipments shall be crated and be of sufficient structural integrity to be lifted and transported by overhead crane or forklift truck without failure. This is subject to minimum order quantity.

#### 7.0 Warranty

- 7.1 The system shall carry a full 12 months parts warranty.

## *AUTOMATIC RETRACTABLE SECURITY BOLLARDS*

### **PRODUCT DETAIL SPECIFICATION**

#### **8.0 Manufacturer's Data**

**8.1** Drawings, Installation Data and generic drawings should be made available by manufacturer

#### **9.0 Disclaimer**

**9.1** Careful consideration must be devoted to the selection, design and location of an automatic rising bollard system in the same manner as any other product that may be used to close off a roadway. Care must be taken to ensure approaching vehicles and pedestrians are made fully aware that automatic rising bollards are in operation through appropriate signage.

#### **10.0 Procurement Details**

**10.1** The GloBoll automatic hydraulic rising bollard system shall be purchased from:

**10.2** Ameristar Security Products, 1555 N Mingo Road Tulsa, OK 74116

**10.3** Contact: Phone: (918) 835 0898, Fax: (918) 835 1002

**10.4** web:[www.ameristarsecurity.com](http://www.ameristarsecurity.com)